


Part Number	Length(L)mm
AC6MF-PL150TK	150 ⁺²⁵ ₀
AC6MF-PL300TK	300 ⁺²⁵ ₀
AC6MF-PL1000TK	1000 ⁺⁷⁵ ₀


PIN ASSIGNMENT

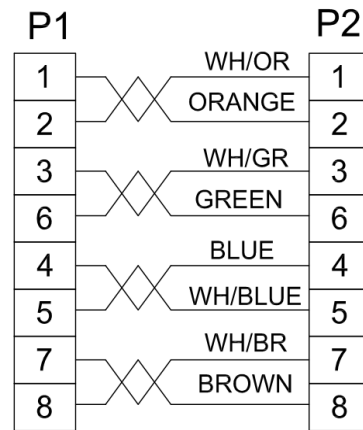

*パネル側寸法 AC6MF-XXXXTK

TEST CONDITION

1. OPEN/SHORT : 100%
2. INSULATION RESISTANCE: 20 Mohm min
3. CONTACT RESISTANCE: 1 ohm max
4. HI POT: DC300v/10ms

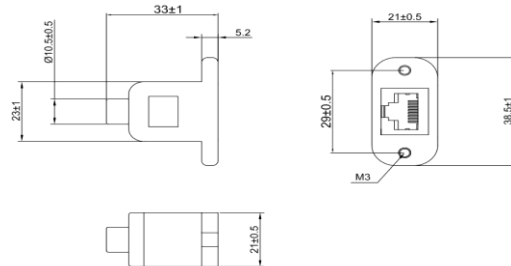

RoHS2 compliant product

⑦	Tube	Heat shrink tube φ 1.5mm Black	-
⑥	Nut	NUT 4.75×2.0 M3	-
⑤	Outer mold	PVC 50 WHITE	WHITE
④	Inner mold	PE	-
③	Plug	RJ45 8P8C/F with Shell OR EQU	-
②	Plug	RJ45 8P8C/M(F) PLUG 30U"	-
①	Cable	CAT 6A UTP 23AWG 4P+FILLER OD:6.0mm WHITE 30V	WHITE

No	Material	Description	Color
Unit:mm	Approved	Checked	Desingner

Part No:AC6MF-PL***TK