


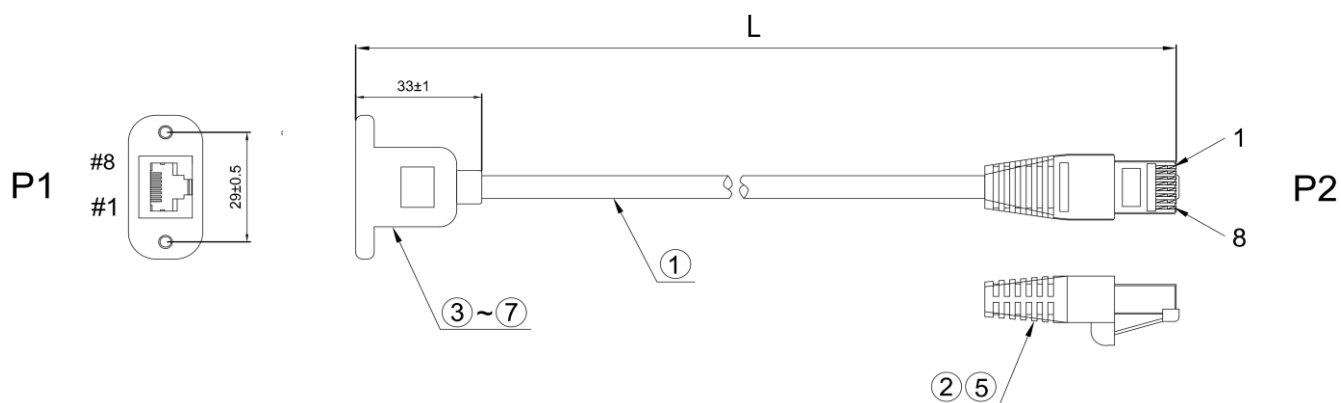

Part Number	Length(L)mm
AC6MF-PL150TK	150 ₀ ⁺²⁵
AC6MF-PL300TK	300 ₀ ⁺²⁵
AC6MF-PL1000TK	1000 ₀ ⁺⁷⁵

PIN ASSIGNMENT

P1		P2
1	WH/OR	1
2	ORANGE	2
3	WH/GR	3
6	GREEN	6
4	BLUE	4
5	WH/BLUE	5
7	WH/BR	7
8	BROWN	8

TEST CONDITION

- 1.OPEN/SHORT : 100%
2. INSULATION RESISTANCE:20 Mohm min
- 3.CONTACT RESISTANCE: 1 ohm max
4. HI POT:DC300v/10ms

RoHS2 compliant product

⑦	Tube	Heat shrink tube ϕ 1.5mm Black	-
⑥	Nut	NUT 4.75 $\times$ 2.0 M3	-
⑤	Outer mold	PVC 50 WHITE	WHITE
④	Inner mold	PE	-
③	Plug	RJ45 8P8C/F with Shell OR EQU	-
②	Plug	RJ45 8P8C/M(F) PLUG 30U"	-
①	Cable	CAT 6A UTP 23AWG 4P+FILLER OD:6.0mm WHITE 30V	WHITE
No	Material	Description	Color
Unit:mm	Approved	Checked	Desingner
		RJ45/F To RJ45/M Cabele	
		 https://cabledirect.jp	Version: A

Part No:AC6MF-PL***TK