


PIN ASSIGNMENT

Part Number	Length(L)mm
USB2-MBMPBF5-01TK	300⁺⁵⁰₀

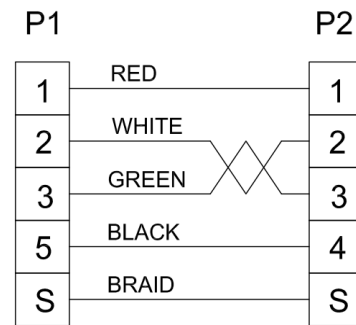

TEST CONDITION

1. OPEN/SHORT : 100%
2. INSULATION RESISTANCE: 10 Mohm min
3. CONTACT RESISTANCE: 1 ohm max
4. HI POT: DC250v/10ms

RoHS2 compliant product

⑩	Copper foil	COPPER FOIL W=18mm	-
⑨	Outer mold	PVC 50 BLACK	BLACK
⑧	Inner mold	PE	-
⑦	Outer mold	PVC 30 BLACK	BLACK
⑥	Nut	NUT 4.75 × 2.0 #4-40	-
⑤	Plug	USB B 4P FEMALE PBT WHITE	-
④	Shell	BACK SHELL NICKEL-PLATE(MINI USB 5P/M)	-
③	Shell	FLONT SHELL NICKEL-PLATE(MIN USB 5P/M)	-
②	Plug	MINI USB 5P/M	-
①	Cable	UL2725 #28 × 1P+#28 × 2C+ADB OD3.5mm BLACK VW-1 30V	BLACK

No	Material	Description	Color
Unit:mm	Approved	Checked	Desingner
		USB2.0 A B/F TO MINI USB B/M CABLE	Version: A



Part No:USB2-MBMPBF5-※※TK