


**PIN ASSIGNMENT**

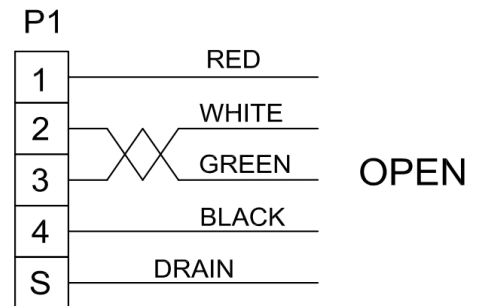


Part Number	Length(L)mm
USB2-R3-AM-OPEN-0110MTK	1100 <sup>+70</sup> <sub>-0</sub>

**TEST CONDITION**

1. OPEN/SHORT : 100%
2. INSULATION RESISTANCE: 20 Mohm min
3. CONTACT RESISTANCE: 1 ohm max
4. HI POT: DC300v/10ms

RoHS2 compliant product

⑦	Copper foil	COPPER FOIL W=5mm	-
⑥	Copper foil	COPPER FOIL W=20mm	-
⑤	Outer mold	PVC 50 BLACK	BLACK
④	Shell	BACK SHELL NICKEL-PLATE(USB 4P/M)	-
③	Shell	FLONT SHELL NICKEL-PLATE(USB 4P/M)	-
②	Plug	USB B 4P MAIL PBT WHITE	-
①	Cable	UL2725 #28×1P+#28×2C+ADB OD3.5mm BLACK VW-1 30V	BLACK
No	Material	Description	Color
Unit:mm	Approved	Checked	Desingner
		USB2.0 A/M TO OPEN CABLE	 <a href="https://cabledirect.jp">https://cabledirect.jp</a>
			Version: A

**Part No:USB2-R3-AM-OPEN-※※※※MTK**