


Part Number	Length(L)mm
USB3-AMPAF-0300TK	300 ⁺⁴⁰ ₋₀
USB3-AMPAF-0600TK	600 ⁺⁴⁰ ₋₀
USB3-AMPAF-0900TK	900 ⁺⁶⁰ ₋₀
USB3-AMPAF-1200TK	1200 ⁺⁶⁰ ₋₀
USB3-AMPAF-1500TK	1500 ⁺⁶⁰ ₋₀
USB3-AMPAF-1800TK	1800 ⁺⁶⁰ ₋₀

PIN ASSIGNMENT

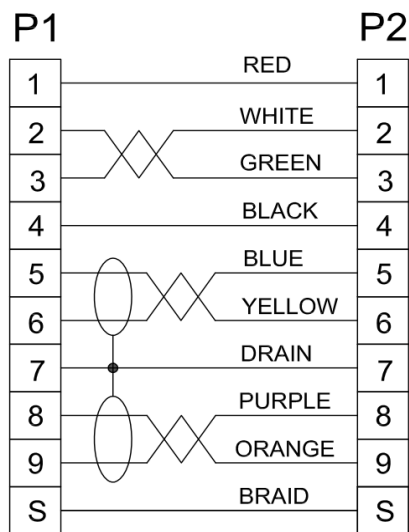

TEST CONDITION

1. OPEN/SHORT : 100%
2. INSULATION RESISTANCE: 20 Mohm min
3. CONTACT RESISTANCE: 3 ohm max
4. HI POT: DC300v/10ms

RoHS2 compliant product

⑪	Copper foil	COPPER FOIL	-
⑩	Nut	NUT 4.75×6.0mm M3	-
⑨	TUBE	HEAT SHRINK TUBE	-
⑧	Outer mold	PVC 50 BLACK	BLACK
⑦	Outer mold	PVC 30 BLACK	BLACK
⑥	Inner mold	PE	-
⑤	Plug	USB 3.0 A/F PBT BLUE G/F	-
④	Shell	BACK SHELL NICKEL-PLATE(USB3.0 A/M)	-
③	Shell	FRONT SHELL NICKEL-PLATE(USB3.0 A/M)	-
②	Plug	USB3.0 A MALE PBT:BLUE 15U" SHELL:NICKEL PLATED	-
①	Cable	UL20276(28#×1P+D+AL,M)×2C+28#1P+24#2C+AB PVC OD5.5mm VW-1 BLACK	BLACK

No	Material	Description			Color
Unit:mm	Approved	Checked	Desingner	USB3.0 A/M TO A/F CABLE	Version: A



Part No:USB3-AMPAF-※※※※TK