

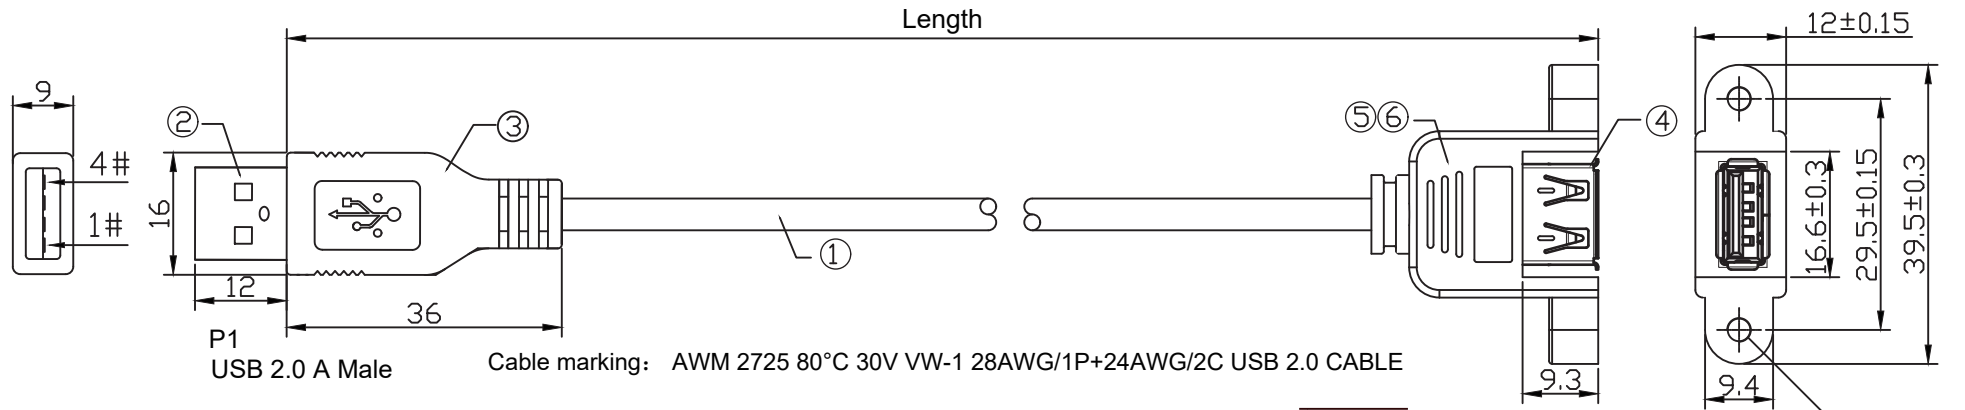


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2024/10/18	

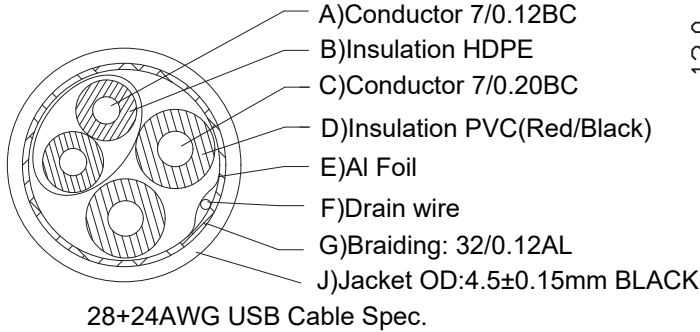

Cable marking: AWM 2725 80°C 30V VW-1 28AWG/1P+24AWG/2C USB 2.0 CABLE

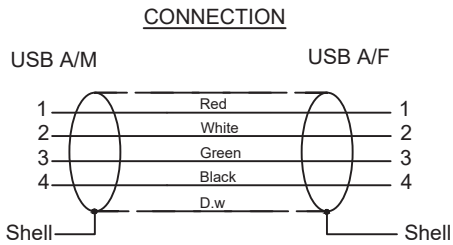

Item NO.	Length(m)
USB2-AMPAF-01T	0.3m ± 20mm
USB2-AMPAF-03T	0.9m ± 30mm
USB2-AMPAF-06T	1.8m ± 50mm

ITEM	DESCRIPTIONS & SPECIFICATIONS	QTY	REMARK
⑦	Nut, M3*0.5	2PCS	
⑥	External Mold, Outer Mould PVC, Black		
⑤	Innernal Mold, Inner Mould PE		
④	Connector, USB A Female, Nickle-Plated	1PC	
③	External Mold, Outer Mould PVC, Black		
②	Connector, USB A Male, Nickle-Plated	1PC	
①	Cable, 28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+D+32/0.12ALB +OD4.5PVC BLACK		

TOLERANCES UNLESS OTHERWISE STATED
 X = ±1
 .X = ±0.2
 .XX = ±0.1

パネルマウントUSBケーブル			
https://cabledirect.jp			
ERP NO.:		SAMPLE DWG NO.:	
PART NO.:	USB2-AMPAF-××T	REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB A Male TO A Female	PAGE NO	1/1
		DATE	2024/10/18
APPROVAL	CHECKED	DRAWN	