


REV.	REVISED DESCRIPTION	DATE	CHECKED
A0	FIRST RELEASE	2024/10/18	

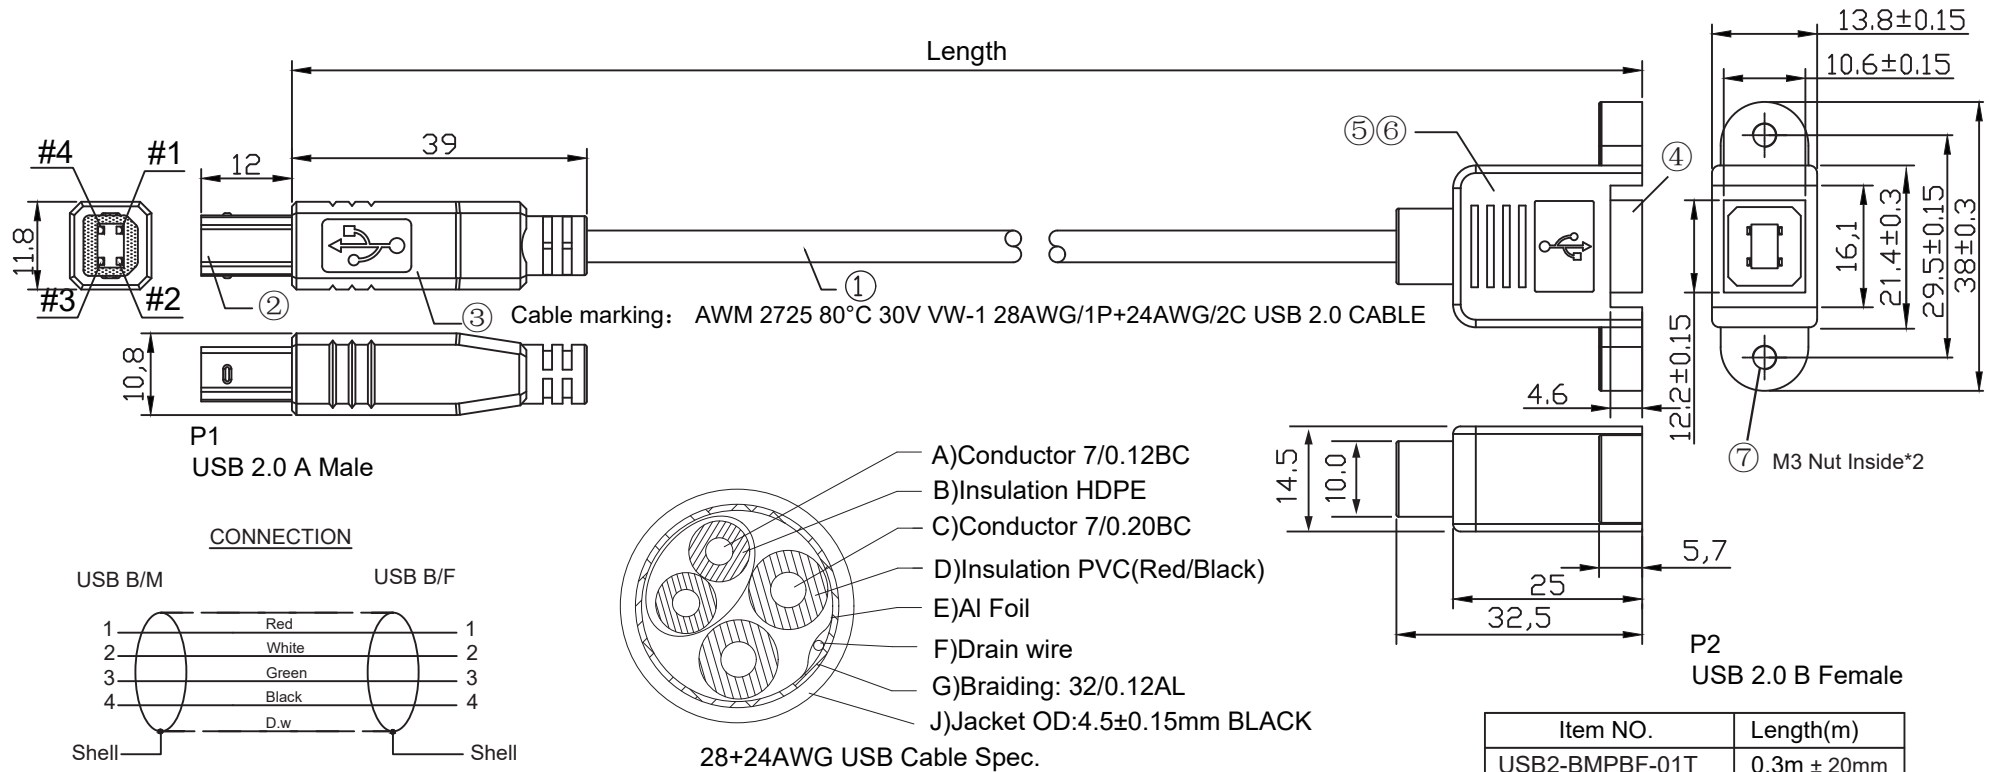

⑦	Nut	Nut, M3*0.5	2PCS	
⑥	External Mold	Outer Mould PVC, Black		
⑤	Innernal Mold	Inner Mould PE		
④	Connector	USB B Female, Nickle-Plated	1PC	
③	External Mold	Outer Mould PVC, Black		
②	Connector	USB B Male, Nickle-Plated	1PC	
①	Cable	28+24 USB Cable OD:4.5mm 28+24 (7/0.12BC+HDPE)*1P + (7/0.20BC +PVC)*2C+D+32/0.12ALB +OD4.5PVC BLACK		
ITEM	DESCRIPTIONS & SPECIFICATIONS		QTY	REMARK

TOLERANCES UNLESS OTHERWISE STATED
X = ±1
.X = ±0.2
.XX = ±0.1

USBパネルマウントケーブル			
<a href="https://cabledirect.jp">https://cabledirect.jp</a>			
ERP NO.:		SAMPLE DWG NO.:	
PART No.:	USB2-BMPBF-××T	REVISION	A0
CUSTOMER:		UNIT	mm
CUSTOMER P/N:		SCALE	NO
DESCRIPTION	28+24 USB B Male TO B Female	PAGE NO	1/1
		DATE	2024/10/18
APPROVAL	CHECKED	DRAWN	