



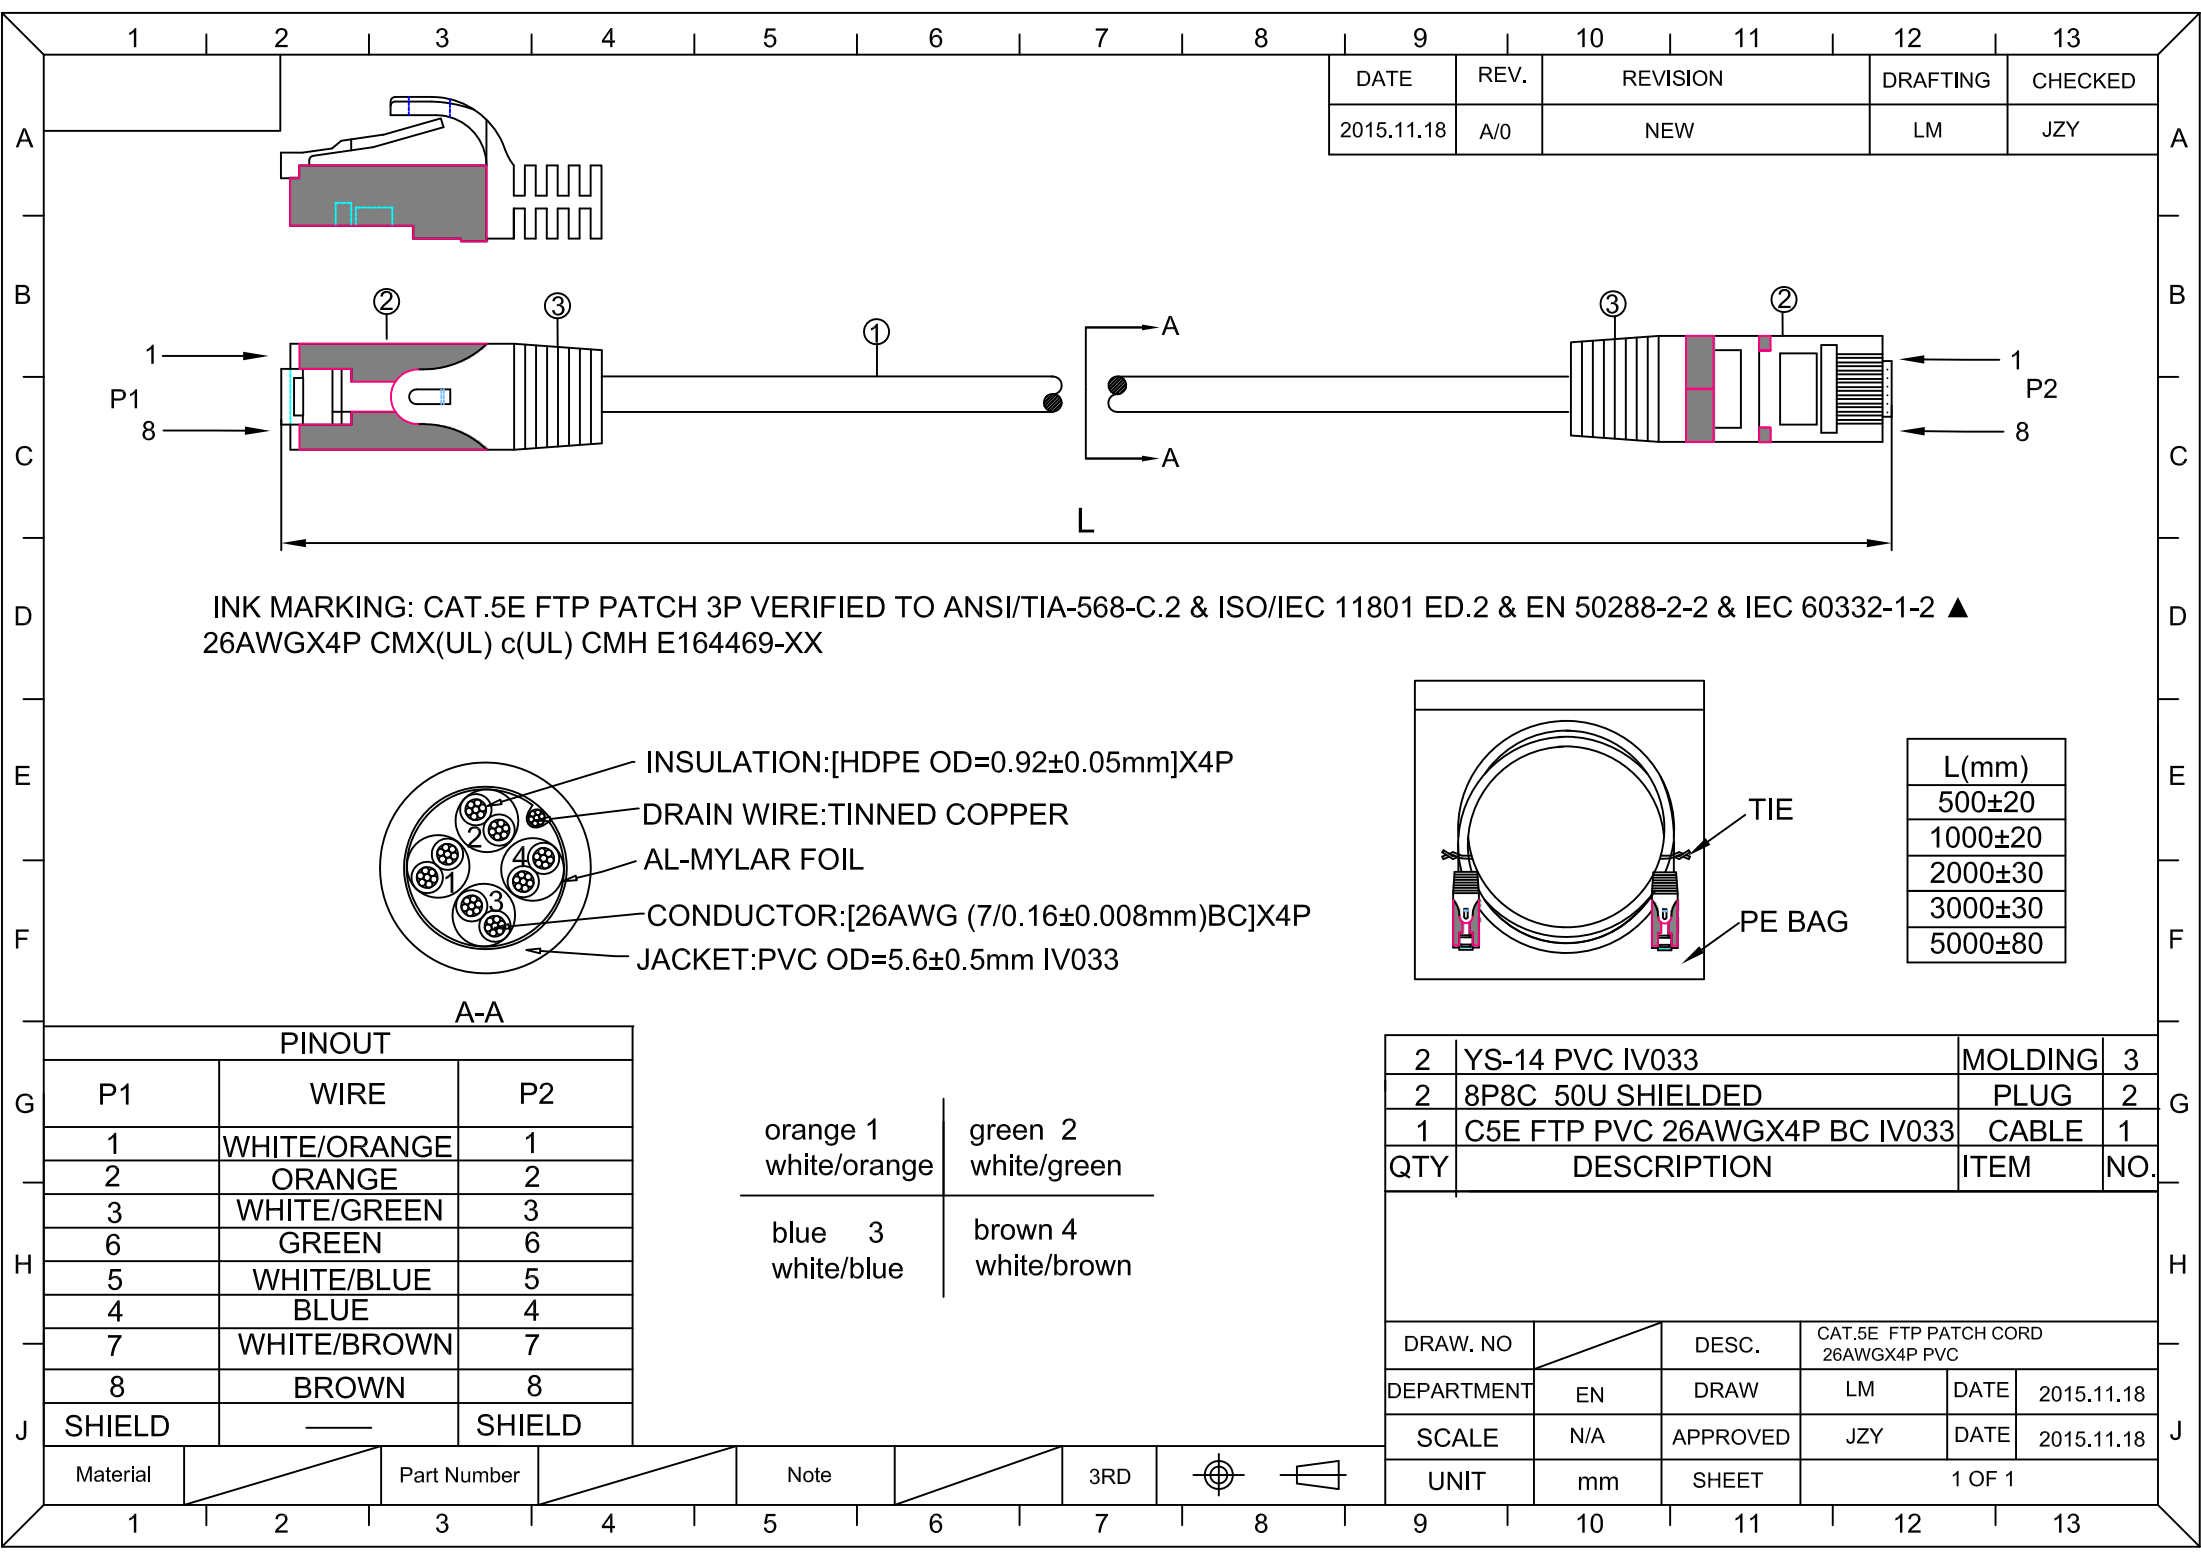

DATE	REV.	REVISION	DRAFTING	CHECKED
2015.11.18	A/0	NEW	LM	JZY

INK MARKING: CAT.5E FTP PATCH 3P VERIFIED TO ANSI/TIA-568-C.2 & ISO/IEC 11801 ED.2 & EN 50288-2-2 & IEC 60332-1-2 ▲
26AWGX4P CMX(UL) c(UL) CMH E164469-XX

- INSULATION:[HDPE OD=0.92±0.05mm]X4P
- DRAIN WIRE:TINNED COPPER
- AL-MYLAR FOIL
- CONDUCTOR:[26AWG (7/0.16±0.008mm)BC]X4P
- JACKET:PVC OD=5.6±0.5mm IV033

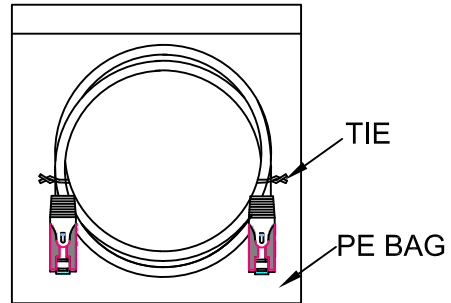

L(mm)
500±20
1000±20
2000±30
3000±30
5000±80

A-A

PINOUT

P1	WIRE	P2
1	WHITE/ORANGE	1
2	ORANGE	2
3	WHITE/GREEN	3
6	GREEN	6
5	WHITE/BLUE	5
4	BLUE	4
7	WHITE/BROWN	7
8	BROWN	8
SHIELD	—	SHIELD

orange 1 white/orange	green 2 white/green
blue 3 white/blue	brown 4 white/brown

2	YS-14 PVC IV033	MOLDING	3
2	8P8C 50U SHIELED	PLUG	2
1	C5E FTP PVC 26AWGX4P BC IV033	CABLE	1
QTY	DESCRIPTION	ITEM	NO.

DRAW. NO	EN	DESC.	CAT.5E FTP PATCH CORD 26AWGX4P PVC		
DEPARTMENT	EN	DRAW	LM	DATE	2015.11.18
SCALE	N/A	APPROVED	JZY	DATE	2015.11.18
UNIT	mm	SHEET	1 OF 1		

Material	Part Number	Note	3RD	
----------	-------------	------	-----	--